


Optimal FO Build Out Attenuators

Application

Optimal stock a range of Build Out Style Attenuators to suit most common applications. Attenuator simply plugs into the existing adaptor, to add the required attenuation level to your existing optical link.

Features

- High quality ferrules ensure Optimal performance
- Bi-directional use
- Environmentally Stable and Reliable
- Small Size
- Excellent Return Loss
- Build Out Style for easy use.
- Suits both 1310 & 1550nm Wavelengths
- Other types and values available on request.

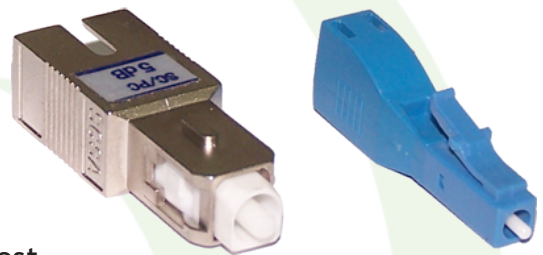

Specifications

Operating Wavelength	1310/1550nm
Attenuation Levels	0 to 30dB
Attenuation Accuracy	0-10dB ± 0.5 dB, 11-30dB $\pm 5\%$ dB
Return Loss	>50dB(PC), >60dB(APC)
Operating Temperature	-40 °C to +85 °C

Ordering Details

Code	Type
BOA	Build Out Attenuator

	Connector Type
FC	FC Attenuator
ST	ST Attenuator
SC	SC Attenuator
SA	SC/APC Attenuator
LC	LC Attenuator

	Attenuation Level
03	3dB
05	5dB
10	10dB

BOA 4&5 6&7

Optimal Cable Services Pty. Ltd.

100 Olympia Street
Tottenham, Victoria, 3012
Ph: 03-9316-8300 / Fax: 03-9314-1722

Email: sales@optimal.com.au

Web: www.optimal.com.au

Cable & Connectivity Sales

Vic : 0430 494 022 - Murray Meltzer NSW : 0400 122 738 - Mike Cotie
 : 0412 361 281 - Paul Cross : 0400 122 670 - Bruce Christie
 Qld : 0407 630 429 - Ian Lee : 0422 651 321 - Martin Prendergast
 SA : 0412 361 281 - Paul Cross WA : 0407 630 429 - Ian Lee
 Tas : 0430 494 022 - Murray Meltzer NZ : 021 496 919 - Jim Donachie