


Optical Fibre Inline Splice Closure - Direct Burial

The OPT-CB02-72 fibre optic splice closure is designed for straight through or branching applications and can be used in almost any environment including direct burial and aerial applications.

Key Features

- 96 fibre capacity
- Resistant to the effects of heat & cold,
- Resistant to ultraviolet radiation
- Waterproof
- Easy to re-enter, no re-entry tool kit required
- All accessories and tooling supplied

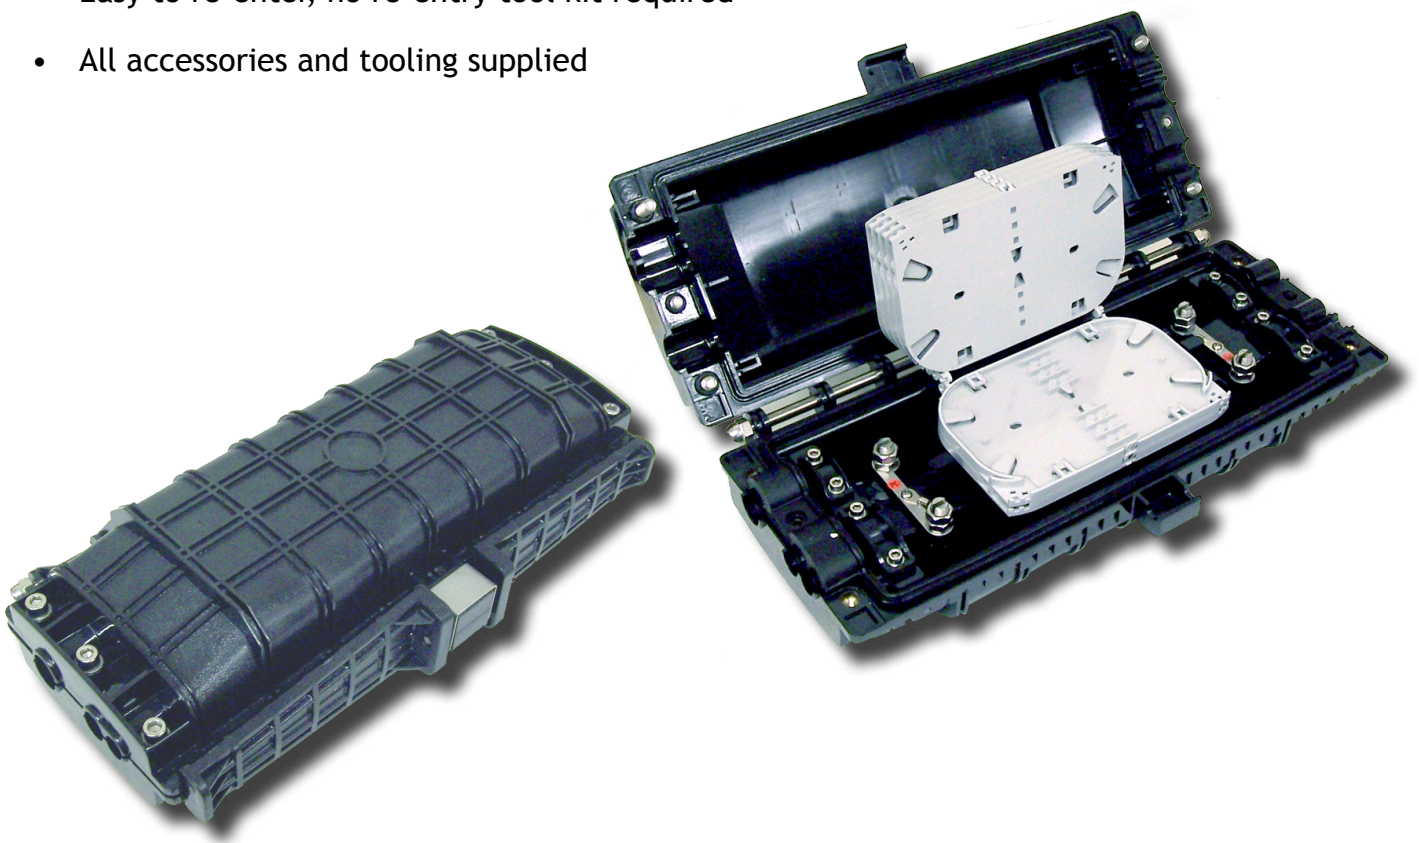

Specifications

Part Number	Cable Entries	Fibre Count	No. of Trays	Dimensions (mm)	Max Cable Diameter
OPT-CB02	4 ports	96 fibres	4	396 x 200 x 126	2 ports - 16mm 4 ports - 20mm

Ordering Details

OPT-CB02	Inline splice closure - 96 fibres, with all accessories
----------	---

Optimal Cable Services Pty. Ltd.

100 Olympia Street
Tottenham, Victoria, 3012

Ph: 03 9316 8300 / Fax: 03 9314 1722

Email: sales@optimal.com.au
Web: www.optimal.com.au

Cable & Connectivity Sales

Vic : 0430 494 022 - Murray Meltzer
: 0412 361 281 - Paul Cross

NSW : 0400 122 738 - Mike Cotie
: 0422 651 321 - Martin Prendergast

Qld : 0414 701 292 - Eric Brace
: 0407 630 429 - Ian Lee

WA : 0407 630 429 - Ian Lee

SA : 0412 361 281 - Paul Cross

Tas : 0430 494 022 - Murray Meltzer

NZ : +61-412-361-281 - Paul Cross