

Application


The 300 series of 10/100/1000Mb media converters utilise fibre optics to extend the physical distance range of typical ethernet links.

Features

- Auto select 10/100/1000TX
- Supports full-duplex or half-duplex, auto sensing
- Indicator LEDs for Link Loss, Transmission, Diagnostics & Data
- MTBF: > 50,000 hrs
- Stand alone or 2U Rack systems available

Specifications

Speed	10/100/1000TX / 1000FX
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX/FX Fast Ethernet IEEE802.3ab 1000 Base-T IEEE802.3z 1000 Base-SX/LX Gigabit Ethernet, IEEE802.1q, IEEE802.1p QoS, IEEE802.1d
Ethernet Port	RJ45
Fibre Port	SC standard (ST, FC optional)
Wavelength	850nm, 1310nm, 1550nm
Time Delay	< 10us
BER	<1/1000000000
Power	220VAC 0.5A (internal power) <5W dissipation
Environment	Operating Temp: 0°C - 50°C Operating Humidity: 5% - 95% Storage Temp: -40°C - 70°C Storage Humidity: 5% - 95% non-condensing
Dimensions (mm)	Internal Power : 31 x 127 x 155mm Module Card : 25 x 113 x 78mm

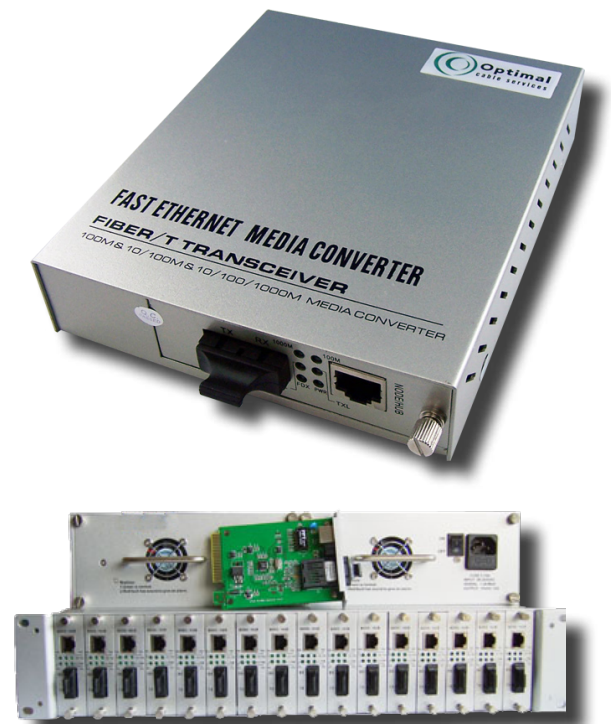

Ordering Details

External Power Supply	Fibre	Wavelength	Range
OM310-GE/SX	MM	1310nm	550m
OM310-GE/S20	SM	1310nm	20km
OM310-GE/S30	SM	1310nm	30km
OM310-GE/S50	SM	1550nm	50km
OM310-GE/S80	SM	1550nm	80km

Optimal Cable Services Pty. Ltd.

100 Olympia Street
Tottenham, Victoria, 3012

Ph: 03 9316 8300 / Fax: 03 9314 1722

Email: sales@optimal.com.au
Web: www.optimal.com.au

Cable & Connectivity Sales

Vic : 0430 494 022 - Murray Meltzer
: 0412 361 281 - Paul Cross

NSW : 0400 122 738 - Mike Cotie
: 0422 651 321 - Martin Prendergast

Qld : 0414 701 292 - Eric Brace
: 0407 630 429 - Ian Lee

WA : 0407 630 429 - Ian Lee

SA : 0412 361 281 - Paul Cross

Tas : 0430 494 022 - Murray Meltzer

NZ : +61-412-361-281 - Paul Cross